
41mm CONDUIT NIPPLE



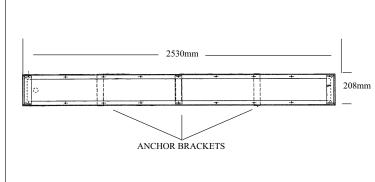

*CALTRANS APPROVED

SPECIFICATIONS

Luminaire Name: Caltrans Approved Undertruck Light **Description:** Extruded aluminum housing with 1" thick

polycarbonate lens. Each lens assembly is tightly gaskted and silicon sealed preventing any moisture from entering fixture compartment. Fixture is provided with one T12-96 high output lamp providing maximum performance. Threaded apertures allow for easy conduit entry points. Ballast box assembly is remote.

Material: Extruded Aluminum **Refractor:** Polycarbonate UV stabilized

Wattage/Lamping:

• T12-96 High Output Lamps

Distribution: Symmetric or Asymmetric **Voltage:** 120, 208, 240, 277 or 480 volt

Options: Consult Factory

Dimensions: All dimensions are nominal **Photometry:** Available upon request on I.E.S. formatted disk **Warranty:** Fixture shall be warranted to be free of defects for two

years. Ballast components shall carry the ballast manufacturer's limited warranty

FINISH

Three Stage:

· Cleaned and Etched

FIXTURE DRAIN COUPLING

- Primered
- · Powder coated

Colors: Black, bronze, green, gray, white

* Custom colors available

APPLICATIONS

- Roadways
- Parking Lots
- Truck Inspection Stations
- Transportation Terminals
- Auto Maintanance Bays
- Bus / Truck Maintanance Bays

SEQUOIA LIGHTING

CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

SEQUOIA LIGHTING SYSTEMS

AREA

ORDERING NUMBER LOGIC

- A DESIGN I.D. Top Right Corner of Cutsheet
- B BALLAST TYPE High Output Fluorescent **T12** = T12-96SHO
- (C) LAMP WATT AGE 1 = T12-96SHO
- (D) <u>IES LIGHT</u> <u>DISTRIBUTI</u>ON $\overline{5}$ = Type V
- (E) REFRACT OR TYPE O = None
- (F) REFRACT OR MA TERIAL PC = Polycarbonate Clear
- (G) PAINT **00** = None BL = Black BR = Bronze VR =Verde GR = Green GY =Gray $\mathbf{WT} =$ White RD =Red
 - BU = Blue Custom (Per Specification)
- $\widehat{\mathrm{H}}$ LAMP OPTION 0 = No Lamp Included = T12-96SHO

CORPORATION