
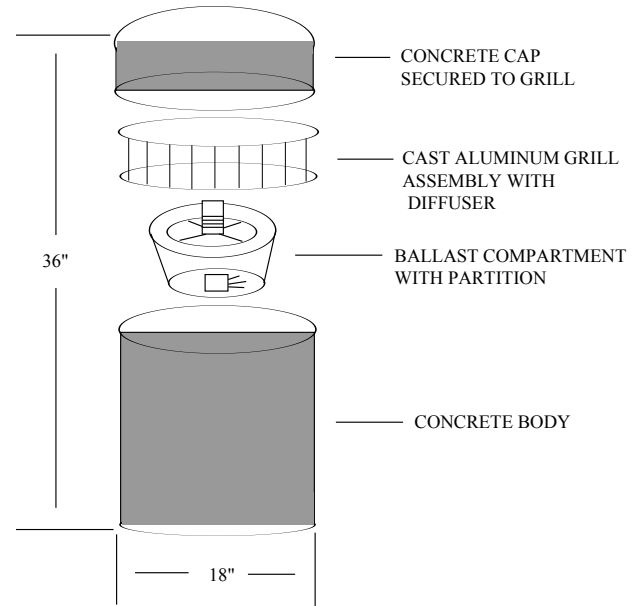
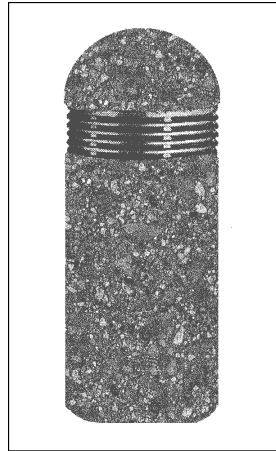


# LUMINAIRE

SEQUOIA LIGHTING SYSTEMS

# BOLLARD CONCRETE

DESIGN  
CB801

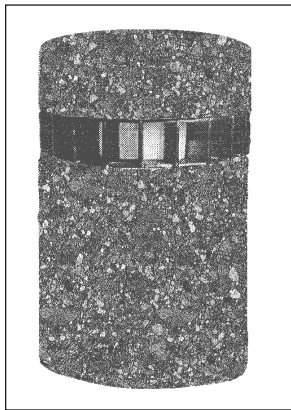

## SPECIFICATIONS

**Luminaire Name:** Miaramar Series  
**Description:** Contemporary style bollard fixture complete with integral ballast assembly

**Material:** Concrete

**Lens/Panels:** Acrylic

**Wattage/Lamping:**

- Mercury Vapor (75,100 watt)
- High Pressure Sodium (70, 100 watt)
- Metal Halide (70,100 watt)
- QL Induction (55, 85 watt)

**Distribution:** Symmetric or Asymmetric

**Voltage:** 120, 208, 240, 277 or 480 volt

**Options:** Shapes, Anti Graffiti Coating

**Dimensions:** All dimensions are nominal

**Photometry:** Available upon request on I.E.S. formatted disk

**Warranty:** Fixture shall be warranted to be free of defects for two

years. Ballast components shall carry the ballast manufacturer's limited warranty

## FINISH

**Colors:** Natural, Gray, Black, Green, Brown, Bronze

\* Custom colors and finishes available

## APPLICATIONS

- Housing Developments
- Condominium / Townhouse Complex
- Perimeter Ltg.
- Transportation Terminals
- Office Complexes
- School Campus
- Shopping Malls
- Hotels/Motels
- Industrial Sites
- Commercial Developments
- Waterfront Areas
- Parks/Recreational Areas
- Architectural Landscape Ltg.

# SEQUOIA LIGHTING

CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 www.sequoialighting.com

ORDERING NUMBER LOGIC

Example: CB800 -M1 -6 -5 -1 -2 -GY -1 -3 -AC -C  
 (A) (B) (C) (D) (E) (F) (G) (H) (I) (J) (K)

(A) DESIGN I.D. Top Right Corner of Cutsheet

- (B) BALLAST TYPE  
 High Pressure Sodium  
 20 = 120V High Power Factor (150W and below)  
 21 = 120V Regulated High Power Factor  
 22 = 120V Normal Power Factor  
 23 = 240V High Power Factor  
 24 = 240V Regulated Power Factor  
 25 = 240V Lag Norma Power Factor  
 26 = 208V Regulated Power Factor  
 27 = 277V Regulated Power Factor  
 28 = 480V Regulated Power Factor  
**M1** = Multi-volt Regulated High Power Factor  
 Wired 120V  
 H6 = 6.6 AMP
- Metal Halide  
 30 = 120V CWA High Power Factor  
 31 = 240V CWA High Power Factor  
 32 = 208V High Power Factor  
 33 = 277V CWA High Power Factor  
 34 = Multi-volt CWA High Power Factor  
 Wired For 120V  
**M6** = 6.6 AMP
- Mercury Vapor  
 02 = 120/240 Regulated High Power Factor  
 Wire For 120V  
 03 = 240/480 Regulated High Power Factor  
 Wire For 240V  
 04 = 208V Regulated High Power Factor  
 05 = 277V Regulated High Power Factor  
 06 = 120V Lag Auto Normal Power Factor  
 07 = Multi-volt Regulated High Power Factor  
 Wired For 120V  
 V6 = 6.6 AMP
- QL Induction** (Please Specify Kelvin Rating)  
**Q1** = 120V  
**Q2** = 240V  
**Q6** = 6.6 AMP

- (C) LAMP WATT AGE  
 1 = 35 Watts  
 2 = 50 Watts  
 3 = 55 Watts  
 4 = 70 Watts  
 5 = 85 Watts  
 6 = 100 Watts

(D) I.E.S. LIGHT DISTRIBUTION  
**5** = Type V Patten

(E) OPTICAL SYSTEM  
 1 = Yes  
 (Rugged cast aluminum louvers  
 with acrylic clear internal cylinder)

(F) LOUVER COLOR  
**1** = White  
**2** = Black  
**3** = Green  
**4** = Brown  
**5** = Bronze

(G) DECOR CONCRETE FINISH (CONSULT FACTORY FOR COLOR CHART)  
**NT** = Natrual  
**GY** = Gray  
**BL** = Black  
**GR** = Green  
**BW** = Brown

**CC** = Custom Per Specification)  
**FOOTING TYPE**  
 0 = Direct Burial Type  
 1 = Baseplate Mounted Type  
 2 = Baseplate mounted Type w/decorative base cover

(I) ANCHOR BOL TS  
 2 = None  
 3 = Yes

(J) INTERNAL CYLINDRICAL LENS  
**GC** = Glass Clear  
**GW** = Glass White  
**PC** = Polycarbonate Clear  
**PW** = Polycarbonate White  
**AC** = Acrylic Clear  
**AW** = Acrylic White

(K) LAMP OPTION  
 0 = No Lamp Included  
**C** = Clear Lamp Included  
**R** = Rapid Start Lamp Included  
**F** = Coated Lamp Included  
**M** = Master Color Lamp Included  
**P** = Protected Metal Halide  
 Lamp Included  
**W** = White Son HPS Lamp Included  
**Q** = QL Induction Lamp Included