
### LUMINAIRE

#### SEQUOIA LIGHTING SYSTEMS

BOLLARD

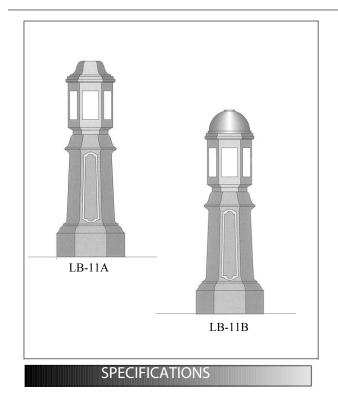

Luminaire Name: Cedar Heights

**Description:** Nostalgia style bollard fixture complete with integral ballast assembly

Material: Cast Aluminum / Spun Aluminum Lens/Panels: Acrylic / Polycarbonate UV stabilized / Glass Wattage/Lamping:

- High Pressure Sodium (35,50,70, 100 watt)
- Metal Halide (70,100 watt)
- QL Induction (55, 85 watt)
- Incandescent


Distribution: Cedar Heights Bollards accent fine archtiture

with pleasing illumination and style for walkways, courtyards, malls and landscape areas. Available in both lit and non-lit.

**Voltage:** 120, 208, 240, 277 or 480 volt **Options:** Photo control

Dimensions:AlldimensionsarenominalPhotometry:AvailableuponrequestonI.E.S.formatteddiskWarranty:Fixture shall be warranted to be free of defects for two

years. Ballast components shall carry the ballast manufacturer's limited warranty

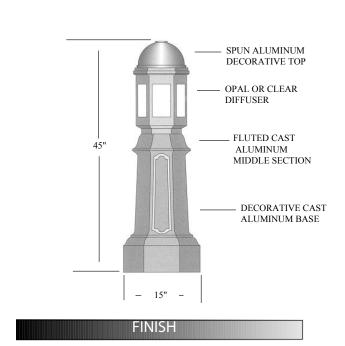

#### Three Stage:

- Cleaned and Etched
- Primered
- Powder coated or wet painted

Colors: Black, bronze, green, gray, swedish iron, verde patina

\* Custom colors and finishes available

#### APPLICATIONS

- Housing Developments
- Condominium / Townhouse Complex
- Perimeter Ltg.
- Transportation Terminals
- Office Complexes
- School Campus
- Shopping Malls
- Hotels/Motels
- Industrial Sites
- Commercial Developments
- Waterfront Areas
- Parks/Recreational Areas
- Architectural Landscape Ltg.

# SEQUOIA LIGHTING

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

## LUMINAIRE

SEQUOIA LIGHTING SYSTEMS

BOLLARD

ORDERING NUMBER LOGIC		
Example: LB500 -M1 -6 -0 -	0 -0 -0 -5 -AC -BR -0	0 -C -O -O -1 - O - A1
A B C D	E F G H I J	K         L         M         N         O         P         Q
(A) <u>DESIGN I.D.</u> Top Right Corner of Cutsheet	C LAMP WATT AGE	(L) LAMP OPTION
BALLAST TYPE High Pressure Sodium	1 = 35  Watts 2 = 50  Watts 3 = 55  Watts	0 = No Lamp Included C = Clear Lamp Included
20 = 120V High Power Factor (150W and below)	3 = 55  Watts 4 = 70  Watts	R = Rapid Start Lamp Included F = Coated Lamp Included
21 = 120V Regulated High Power Factor 22 = 120V Normal Power Factor	5 = 85  Watts 6 = 100  Watts	M = Master Color Lamp Included P = Protected Metal Halide
23 = 240 V High Power Factor	7 = PLxx	Lamp Included
24 = 240V Regulated Power Factor 25 = 240V Lag Norma Power Factor	$ \begin{array}{c} (D) \\ \hline D \\ \hline 0 \\ \hline \end{array} = \begin{array}{c} \text{PHOT OCONTROL} \\ \hline 0 \\ \hline \end{array} $	W = White Son HPS Lamp Included Q = QL Induction Lamp Included
26 = 208 V Regulated Power Factor	1 = With Photo Control	-
27 = 277V Regulated Power Factor 28 = 480V Regulated Power Factor	$(\overline{E})$ INTERNAL GLASS REFRACT OR	$\frac{(M)}{0} = \frac{\text{FUSE OPTION}}{\text{No Fusing}}$
M1 = Multi-volt Regulated High Power Factor Wired 120V	0 = None	1 = (1) 5  Amp Fuse
H6 = 6.6  AMP	1 =Yes	2 = (2) 5  Amp Fuse 3 = (1) 10  Amp Fuse
Metal Halide	(F) DUPLEX RECEPT ACLE (IN BASE) <b>0</b> = None	4 = (2) 10 Amp Fuse
30 = 120 V CWA High Power Factor	1 = Yes	5 = (1) 15 Amp Fuse 6 = (2) 15 Amp Fuse
31 = 240V CWA High Power Factor 32 = 208V High Power Factor	(G) INTERNAL REFLECT OR	7 = (1) 20 Amp Fuse 8 = (2) 20 Amp Fuse
33 = 277V CWA High Power Factor	$\overline{0}$ = None	(-) - · · · · · · · · · · · · · ·
34 = Multi-volt CWA High Power Factor Wired For 120V	1 = Yes	$ \underbrace{(N)}_{0} \underbrace{EYEBOL}_{0} \underbrace{T}_{0} = None $
<b>M6</b> = 6.6 AMP		1 = Yes
Mercury Vapor	2 = Type II 3 = Type III	(O) CUST OM LOGO
02 = 120/240 Regulated High Power Factor Wire For 120V	5 = Type V	$\overline{0} = \text{None}$
03 = 240/480 Regulated High Power Factor	(Î) LENS	1 = Yes
Wire For 240V $04 = 208V Regulated High Power Factor$	$\overline{\mathbf{GC}} = Glass Clear$ $\mathbf{GW} = Glass White$	(P) HOUSE SIDE SHIELD 0 = None
05 = 277V Regulated High Power Factor	PC = Polycarbonate Clear	$ \begin{array}{rcl} 0 & = & \text{None} \\ 1 & = & \text{Yes} \end{array} $
06 = 120V Lag Auto Normal Power Factor 07 = Multi-volt Regulated High Power Factor	<b>PW</b> = Polycarbonate White <b>AC</b> = Acrylic Clear	$(\overline{\mathbb{Q}})$ anchor bol ts
Wired For 120V	$\mathbf{A}\mathbf{W} = \mathbf{A}\mathbf{C}\mathbf{Y}\mathbf{H}\mathbf{C}\mathbf{V}\mathbf{H}\mathbf{H}\mathbf{C}$	$(\underline{Q})  \underbrace{\text{ANCHOR BOL}  \text{TS}}_{\text{AO}} = \text{None}$
V6 = 6.6  AMP	(J) PAINT	A1 = Yes
Fluorescent	$\overline{BL} = Black$	
50 = 120V 53 = 240V	BR = Bronze VR = Verde	
57 = 277V	<b>GR</b> = Green	
QL Induction (Please Specify Kelvin Rating)	GY = Gray $WH = White$	
Q1 = 120V Q2 = 240V	$\mathbf{RD}$ = Red	
Q2 = 240V $Q6 = 6.6  AMP$	<b>BU</b> = Blue <b>CC</b> = Custom (Per Specification)	
Incandescent	$(\widehat{K})$ DIRECT BURIAL	
IN = Specify Wattage	$\overline{0} = None$	
	1 = Yes	

# SEQUOIA LIGHTING

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 www.sequoialighting.com