



ROUND NON TAPERED

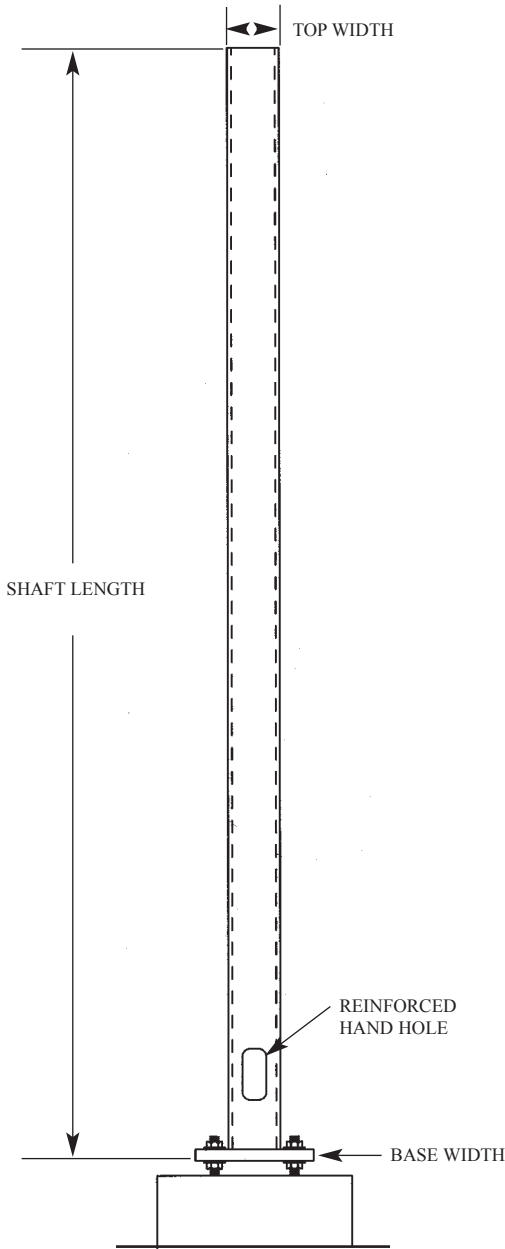

STEEL ARM

SEE STEEL ARM SECTION

ANCHOR BASE DATA

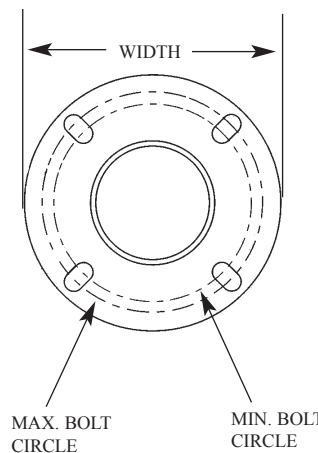

STRUCTURAL DESIGN

Steel poles are designed for the combined effects of both wind and dead load. The wind load effects have been analyzed with wind velocities ranging from 70 to 120 mph plus a 1.3 gust factor. Due to varying wind effects, height correction factors and drag coefficients have been applied to the entire structure. The dead load effects have been determined by using a final deflected position analysis to account for secondary moments caused by eccentric dead loads.

MATERIALS

All Steel pole shafts are made from a single ply steel sheet. This sheet is formed into a tubular shape with one or more longitudinal welds, no weld splices are permitted. This tubular shape has a cross section which is either round or square and is either tapered or non tapered along its length. Standard taper rates include 0.11 inches per foot for square poles and 0.14 inches per foot for round poles. Materials used for the pole shafts meets the requirements of ASTM A500 Grade-C, ASTM A595 Grade A, or ASTM A-572 GR. 65. Poles which exceed 50 feet in length, are designed as two-piece assemblies. These two-piece assemblies are joined together telescoping the upper female section over the lower male section by a minimum lap distance of 1.5 times the female inside diameter. The longitudinally weld seam on the female section is welded both inside and out to insure 100% weld penetration at the telescoped area. Pole assemblies, which exceed 50 feet in height, are also designed with an internal cable guide and strain relief mechanism, which is typically attached at the mid-height of the pole assembly.

BASE PLATE

The anchor base plate is integrally welded to the bottom pole section of all anchor base assemblies with either a telescopic weld or a full penetration weld with a back up bar. The material used for these plates will conform to either ASTM A36 or ASTM A572

FINISH

Each lighting standard is hot dip galvanized or painted. All paint is applied by either powder coat or wet spray process.

SEQUOIA LIGHTING

CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

ORDERING LOGIC

Round Non-Tapered (Anchor Base)

Catalog Number	Gross Weight (Lbs)	STRUCTURE DATA								
		Pole Shaft Data					Base Plate Data			Anchor Bolt Data
		Section	Base O.D. (in)	Top O.D. (in)	Wall Thick (in)	Shaft Length (ft)	Bolt Circle Range (in)	Plate O.D. (in)	Plate Thk. (in)	Dia x Lgth x Hk
SL-RNSP-10-45-B3-AB	97	Base	4.5	4.5	.1563	10	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-12-45-B3-AB	112	Base	4.5	4.5	.1563	12	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-14-45-B3-AB	129	Base	4.5	4.5	.1563	14	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-15-45-B3-AB	136	Base	4.5	4.5	.1563	15	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-16-45-B3-AB	144	Base	4.5	4.5	.1563	16	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-18-45-B3-AB	160	Base	4.5	4.5	.1563	18	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-20-45-B3-AB	175	Base	4.5	4.5	.1563	20	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-20-50-B3-AB	216	Base	5.6	5.6	.1563	20	8.0-9.0	11.00	.75	.75 x 30 x 3
SL-RNSP-25-45-B3-AB	214	Base	4.5	4.5	.1563	25	7.5-8.5	10.00	.75	.75 x 30 x 3
SL-RNSP-25-50-B3-AB	265	Base	5.6	5.6	.1563	25	8.0-9.0	11.00	.75	.75 x 30 x 3
SL-RNSP-25-50-V3-AB	311	Base	5.6	5.6	.1875	25	8.0-9.0	11.00	.75	1 x 36 x 4
SL-RNSP-25-60-B3-AB	325	Base	6.6	6.6	.1563	25	9.0-10.0	12.00	1.00	.75 x 30 x 3
SL-RNSP-25-60-V3-AB	379	Base	6.6	6.6	.1875	25	9.0-10.0	12.00	1.00	1 x 36 x 4
SL-RNSP-30-50-B3-AB	314	Base	5.6	5.6	.1563	30	8.0-9.0	11.00	.75	.75 x 30 x 3
SL-RNSP-30-50-V3-AB	368	Base	5.6	5.6	.1875	30	8.0-9.0	11.00	.75	1 x 36 x 4
SL-RNSP-30-60-V3-AB	448	Base	6.6	6.6	.1875	30	9.0-10.0	12.00	1.00	1 x 36 x 4
SL-RNSP-35-50-V3-AB	426	Base	5.6	5.6	.1875	35	8.0-9.0	11.00	.75	1 x 36 x 4
SL-RNSP-35-60-V3-AB	517	Base	6.6	6.6	.1875	35	9.0-10.0	12.00	1.00	1 x 36 x 4
SL-RNSP-40-50-V3-AB	484	Base	5.6	5.6	.1875	40	8.0-9.0	11.00	.75	1 x 36 x 4
SL-RNSP-40-60-V3-AB	586	Base	6.6	6.6	.1875	40	9.0-10.0	12.00	1.00	1 x 36 x 4

SEQUOIA LIGHTING

CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

617 SO. WALNUT ST. LA HABRA, CA 90631

(562) 691-8774

FAX (562) 691-8659

www.sequoialighting.com