
SEQUOIA LIGHTING SYSTEMS

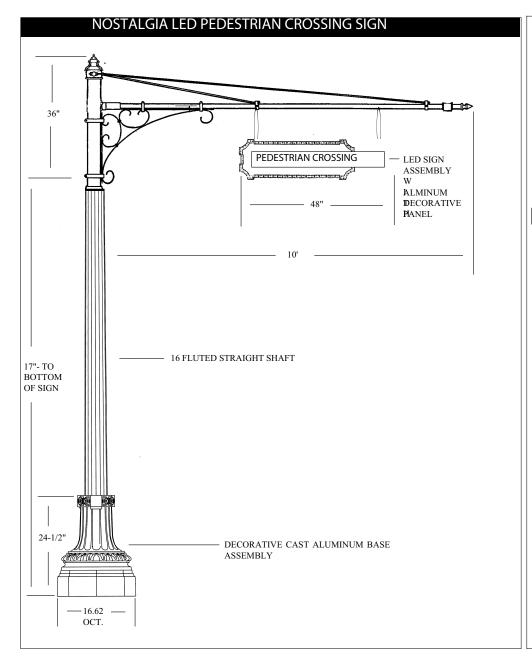

#### SPECIFICATIONS

Lighting standards shall be all all aluminum with decorative base construction. All aluminum alloys shall comply with metallurgical and mechanical properties set forth in the Aluminum Association Standards. Each pole is straight fluted with smooth upper section smooth.

#### SHAFT

The shaft is extruded from ASTM 6061 aluminum alloy tubing. Each pole is fluted with straight upper section on a cast aluminum decorative base. Located in the decorative base of the standard is a large handhole door opening with cover for easy wiring access and fusing.

#### **ANCHOR BOLTS**

Furnished with each standard are four hot dipped galvanized anchor bolts, each with double nuts and double flat washers. Each anchor bolt assembly is provided with a 4" tail. Anchor bolt settings are provided to the customer with each shipment.

### FINISH

Each lighting standard is cleaned, etched and primered prior to the painting process. Standard colors are black, green, bronze or verde patina. All paint is applied by either powder coat or wet spray process. Custom colors and finishes are also available.

## ORDERING NUMBER LOGIC

PRODUCT I.D.	SHAFT TYPE	OVERALL HT.	MATERIAL TYPE	COLOR	OPTIONS
PBN931	1 = 5" Straight Fluted	10 = 10' 12 = 12' 14 = 14' 16 = 16' 00 = Custom HT.	AA = Aluminum CS = Cast Iron CC = Custom	BL = Black BR = Bronze VP = Verde Patina GY = Gray UP = Unpainted CC = Custom	OR = Receptacle OB = Banner Arms OF = Flagpole Hldr. OC = Custom Logo OS = Signage OO = None

# SEQUOIA LIGHTING CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS